


HIGH CUT - DRY FEEL - DURABLE



TECHNICAL PROPERTIES

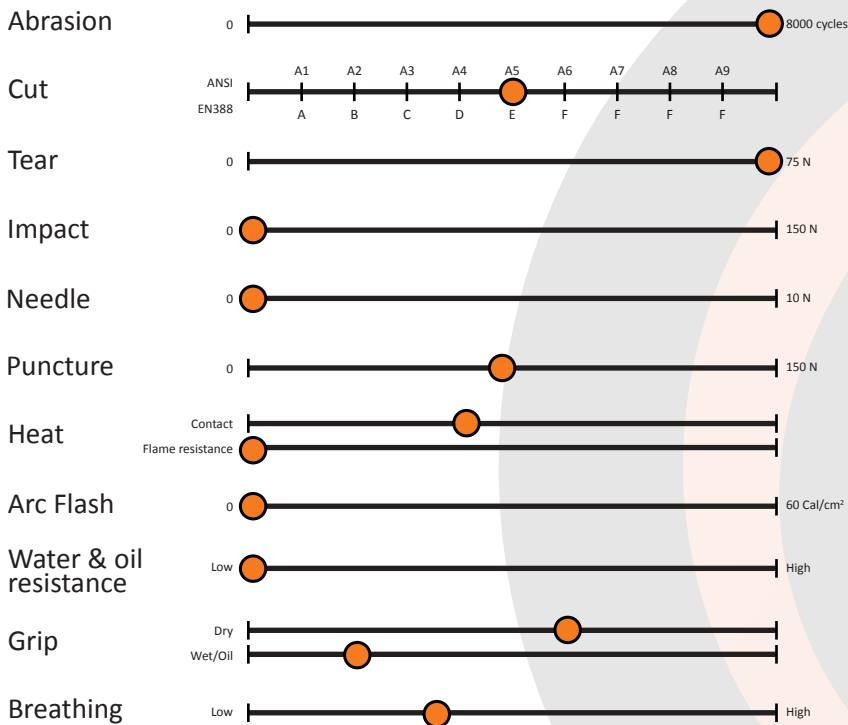

EN388
A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

ISO Cut force (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



ART.NO: 13-4GLSC
 60 pairs (5 dozen)/Carton

