


HIGH ARC FLASH - UNIQUE DESIGN - FLAME RESISTANT



TECHNICAL PROPERTIES

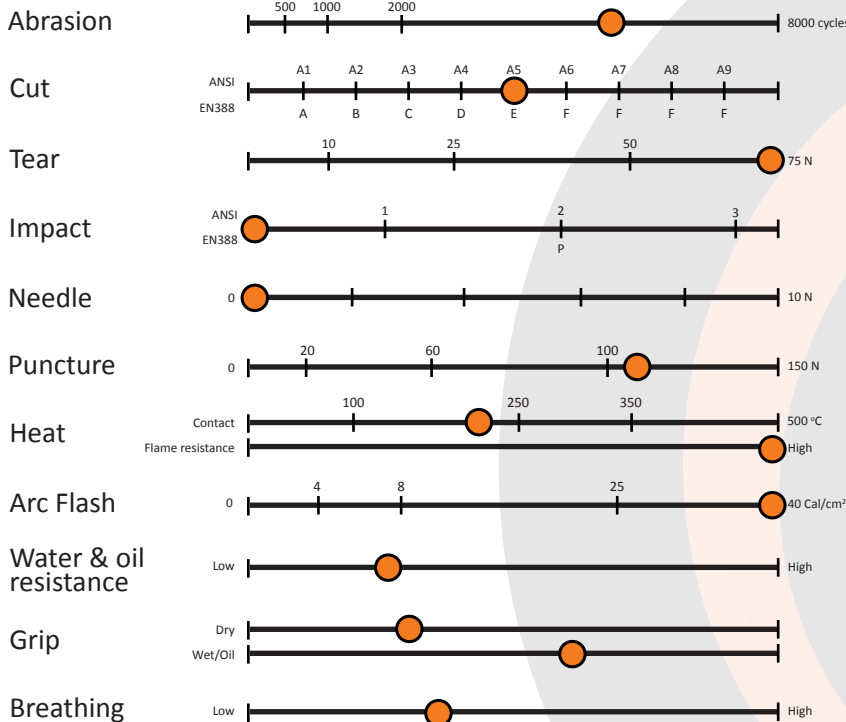

EN388



3X43E

EN407



41324X

ARC FLASH

ASTM F2675, ATPV=

42 Cal/cm² (Palm)

59 Cal/cm² (Back of Hand)

EN 61482 Modified by Aitex (Box Test)=

Class 2

NFPA 70E=

Level 4

ISO Cut force (A-F)

A | > 2 N

B | > 5 N

C | > 10 N

D | > 15 N

E | > 22 N

F | > 30 N



ART.NO: 13-4HAF-50
12 pairs (1 dozen)/Carton

