


ARC FLASH - FLAME RESISTANT - DEXTERITY



TECHNICAL PROPERTIES

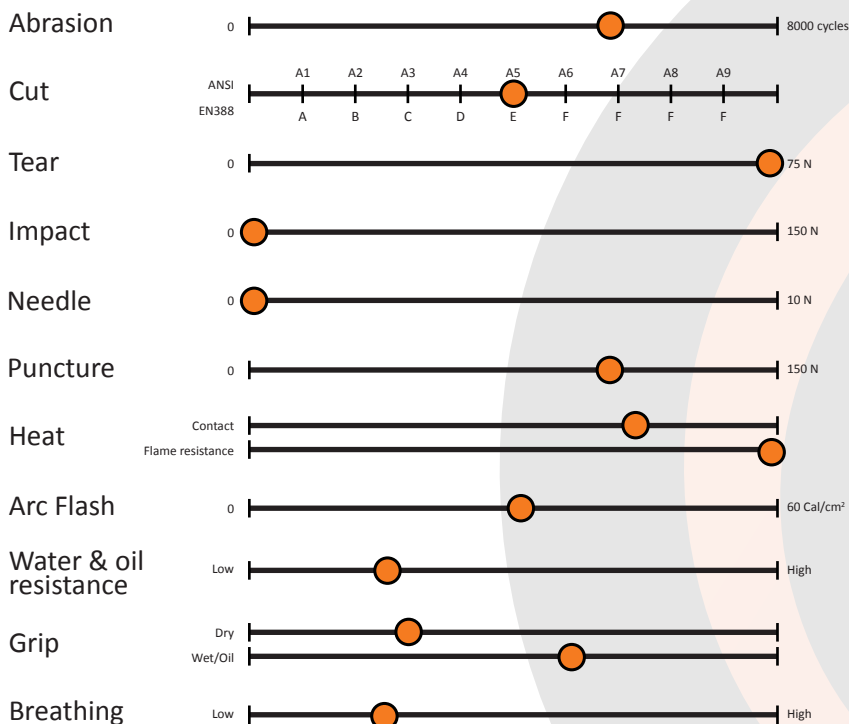

EN388



3543E

- A: ABRASION (1-4)
- B: CUT (1-5)
- C: TEAR (1-4)
- D: PUNCTURE (1-4)
- F: ISO CUT (A-F)
- P: IMPACT PROTECTION

ISO Cut force (A-F)

- A | > 2 N
- B | ≥ 5 N
- C | ≥ 10 N
- D | ≥ 15 N
- E | > 22 N
- F | > 30 N



EN407



41324X

- A: BURNING BEHAVIOUR (1-4)
- B: CONTACT HEAT (1-4)
- C: CONVECTIVE HEAT (1-4)
- D: RADIANT HEAT (1-4)
- E: SMALL SPLASHES OF MOLTEN METAL (1-4)
- F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

ARC FLASH
ASTM F2675, ATPV=
 30 Cal/cm² (Palm)
 16 Cal/cm² (Back of Hand)

ART.NO: 13-4HFR-AF
 60 pairs (5 dozen)/Carton

